

Description VAPELESS/VAPELESS PRO sensor

The sensor is advanced technology gas detection indoor sensor applied for the full sensing of the Vaping gases exhaust by the electronic cigarettes together with environment temperature and humidity, anti-tampering protection. Integrated holistic noise processing algorithms enables detection of the violence in the premises. Sensor detects chemical gas concentrations. **VAPELESS** enclosed in a room sensor box and designed to be wall mounted. **VAPELESS** is powered 12 V DC voltage and is enclosed with 3.6 V batteries for the feeding LoRaWAN infrastructure in the sensor. The data transmitted from the sensor is based on Class A LoRaWAN® wireless network. Sensor has sophisticated **“Pattern Recognition”** AI technology and detects any kind of Vaping gas mix of any kind of Vaping fluids and flavors, even with mixed drugs.



Applications

- Indoor environment measuring
- Smart buildings
- Schools, universities
- Government buildings
- Public buildings
- Banks
- Industrial facilities
- Factories

Product features

- Indoor Vaping detection
- Violence detection
- LoRaWAN communication
- Computational AI algorithm
- Indoor temperature sensor
- Indoor humidity sensor
- Configuration over the air
- Pattern recognition technology
- Auto self-calibration and self-cleaning
- Anti-tampering function



Sensing characteristics


Vaping Index	ranging from 1 to 500 Vaping Index points
Vaping repeatability	<±5 of Vaping Index points
Violence detection	from 1 to 11 (PRO VERSION)
Temperature	-10 to +70 °C
Temperature Accuracy	Max '+/-0.2°C@ 0°C—70°C; Max '+/-0.3°C@ -10°C—0°C
VOC Index	ranging from 1 to 500 VOC Index points
VOC repeatability	<±5 of VOC Index points
Humidity	0 to 100 % RH (non-condensing)
Humidity Accuracy	"±1.8%RH @20°C, >90% "±3%RH @20°C
Additional measured parameters	Ethanol, Hydrogen, Ammonia, CO/measured by ppms (PRO VERSION)
Anti-tampering protection	Optionally, sensor has anti tamper function from silent tilting, turning, impacting (PRO VERSION), ranging from 1 to 5 tamper Index points

Mechanical specification

Weight	Up to 230 g without batteries, up to 290 g with batteries
--------	---

Dimensions	Up to 146 x 130 x 45 mm
Enclosure	Plastic
Storage Temperature	-40 to 70 °C
Sensor Power Supply	
Battery Type and voltage	2x3.6 V AA Lithium Battery ER14505 AA lithium batteries (3.6Vx 2700mAh/section) And external 12 V DC power supply
Expected Battery Life time	<10 years (Depending on configurations and environment)
Sensor logging Function	
Sampling Interval	Configurable via downlink configuration, NFC configuration is optional
Data Upload Interval	Configurable via downlink configuration, NFC configuration is optional
Radio / Wireless specification	
Wireless Technology	LoRaWAN® 1.0.3
Wireless Security	LoRaWAN® End-to-End encryption (AES-CTR), Data Integrity Protection (AES-CMAC)
LoRaWAN Device Type	Class A End-device
Supported LoRaWAN® features	Default - OTAA , Optional - ABP, ADR, Adaptive Channel Setup
Supported LoRaWAN® regions	EU863 – 870 Optional: US902 – 928, EU863 – 870, AU915 – 928, EU433, RU864, IN865
Link Budget	137 dB (SF7) to 151 dB (SF12)
TX Power	14dBm±1dBm (Region specific)
Rx Sensitivity	132 dBm (LoRa, Spreading Factor=12, Bit Rate=293bps) -118 dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)
Communication range	10 km (line-of-sight, actual transmission distance depends on the environment)

Sensor dimensions:

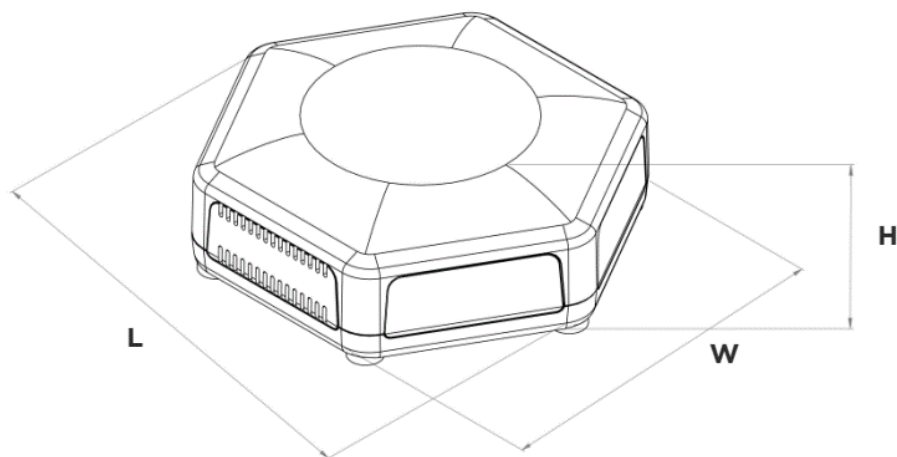

H: 45 mm
W: 130 mm
L: 146 mm



nano sensorics



nano sensorics

VAPELESS vs VAPELESS PRO



CLEANER
SAFER
ENVIRONMENT

Feature	VAPELESS	VAPELESS PRO
Vaping detection	✓	✓
Violence detection	—	✓
Temperature sensor	✓	✓
Humidity sensor	✓	✓
LoRaWAN communication	✓	✓
AI / Pattern Recognition	✓	✓
Over-the-air configuration	✓	✓
Auto self-calibration and self-cleaning	✓	✓
VOC Index (1 – 500)	✓	✓
Anti-tampering function	—	✓
Additional gas measurements	—	✓



Feature availability is shown in the comparison table above.

CREATING
A SAFER
TOMORROW

UAB "Nano sensorics"

Elektrėnų str.7 , LT-51193 Kaunas

www.nanosensorics.com

info@nanosensorics.com